


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 36 TOWNSHIP 17 RANGE 3  
DATE: 12-6-03  
PARTY CHIEF: Wilcoxen  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison  
METHOD OF ESTABLISHMENT: County: 4-25-99

IN. S.P.C. E ZONE NAD '83  
NAME: 17033606  
N: 513845.3639(m)  
E: 60629.0206(m)

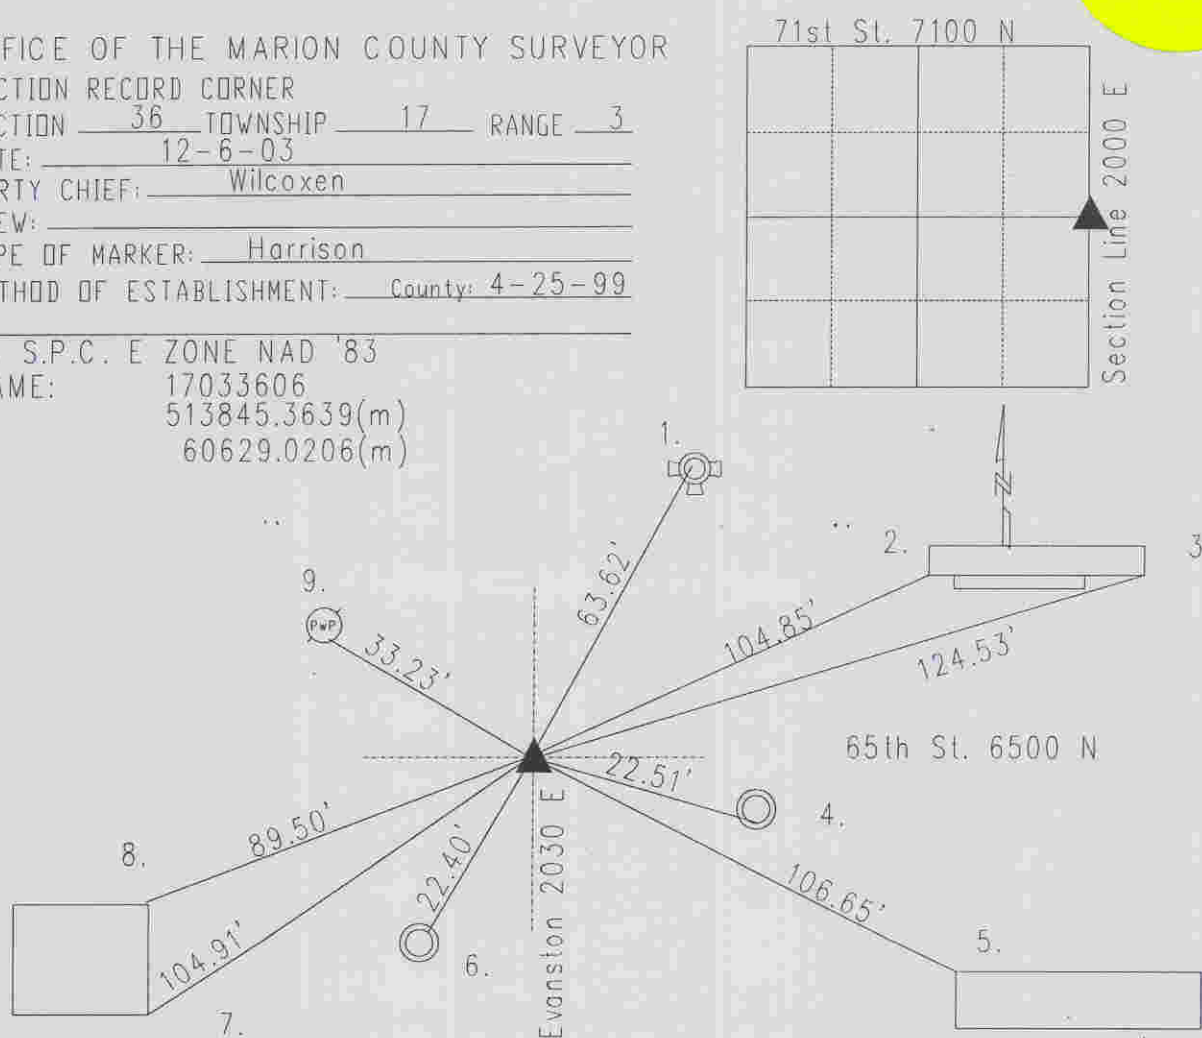

Corner originally set as a post in 1820 by Wm. Laughlin with the following witnesses: 12" sugar bearing north 15 degrees, thence east 16 links, and a 30" elm bearing south 64 degrees, thence east 25 links. (M.C. Atlas p. 8) A survey by Percy Hasbrook on May 10, 1849 indicates a stake where both witness trees stand. (Washington Legal Book p. 9) Corner referenced by MCS on 10/20/43 and called a 1" iron rod. Corner referenced by Monroe on 6/5/61 and called a 1" iron pipe. Corner referenced by Hiselman on 4/1/76 and called a road nail in washer. Corner referenced by Jacobs on 11/18/87 and called a road nail in washer. Corner referenced by Greene on 7/25/94 and called a road nail in washer. Corner referenced by Wilcoxen on 4/25/99 and called a road nail in washer. Corner excavated by Wilcoxen on 11/26/03 and a 1" square pin 24" long was found 5" down. A #205 cast iron Harrison was set in position of the pin. No stone was found.

17033606

REF.	DISTANCE	DESCRIPTION
1.	63.62'	Top nut of fire hydrant
2.	104.85'	SW corner of ADDRESS 2006 stone
3.	124.53'	SE "
4.	22.51'	Cut 'x' S sewer manhole rim
5.	106.65'	NW corner of ADDRESS 6459 frame
6.	22.40'	Cut 'x' NE rim of manhole
7.	104.91'	SE corner of ADDRESS 6424 frame
8.	89.50'	NE corner "
9.	33.23'	Mag nail w/brass washer SW PwP#175 269 B 12"up